

1

2

3

4

版本REV

繪制日期

A

2009-3-27





A

B

C

D

E

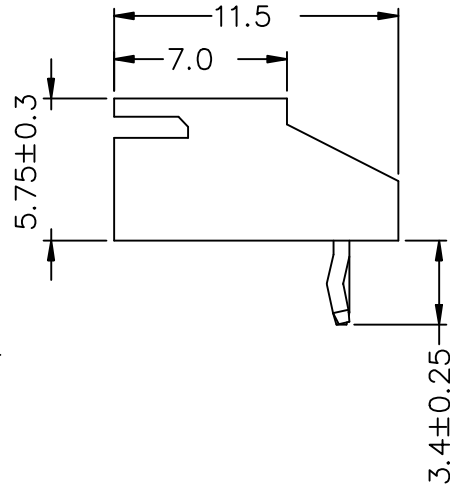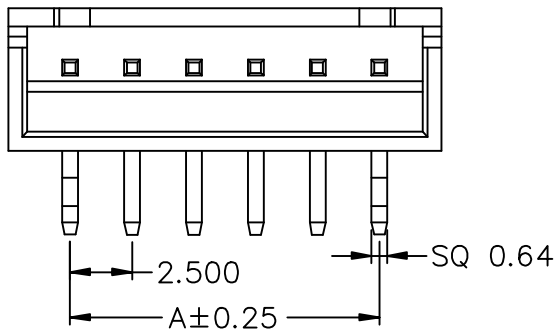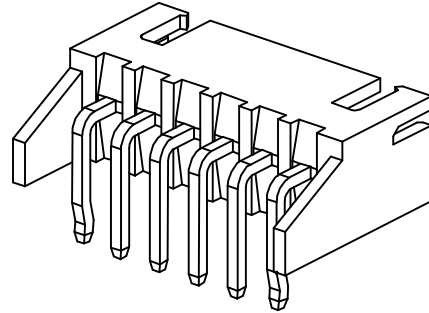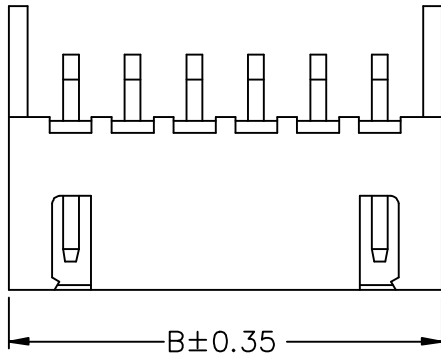

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.50	7.50	12	27.50	32.50
03	5.00	10.00	13	30.00	35.00
04	7.50	12.50	14	32.50	37.50
05	10.00	15.00	15	35.00	40.00
06	12.50	17.50	16	37.50	42.50
07	15.00	20.00	17	40.00	45.00
08	17.50	22.50	18	42.50	47.50
09	20.00	25.00	19	45.00	50.00
10	22.50	27.50	20	47.50	52.50
11	25.00	30.00			

NOTE:

- Welding Board Angle: R-Right Angle 90°
- Material: NYLON 66 UL 94V-0
- Material(Pin): Brass
- Finish(Pin): Tin-Plated

一般公差: GENERAL TOLERANCE

更改說明: REV. DESCRIPTION

更改說明: REV. DESCRIPTION

尺寸範圍DIM

①

④

10.01以上之尺寸

±0.20

②

⑤

10.00以內之尺寸

±0.15

③

⑥

孔位

±0.10

核准APPD

朱小华

2009-3-27

模型:

料號: ITEM NO

文件編號

審核CHD

MODEL

A2501WR-00-NP

SC-EW-11

繪圖DWN

Liaozting

2009-3-27

比例: SCALE




SHIH CHUAN ELECTRONICS

規格: SPEC

2.50mm Crimp Style Connectors


A	1	2	3	4
				版本REV
			A	2009-3-27

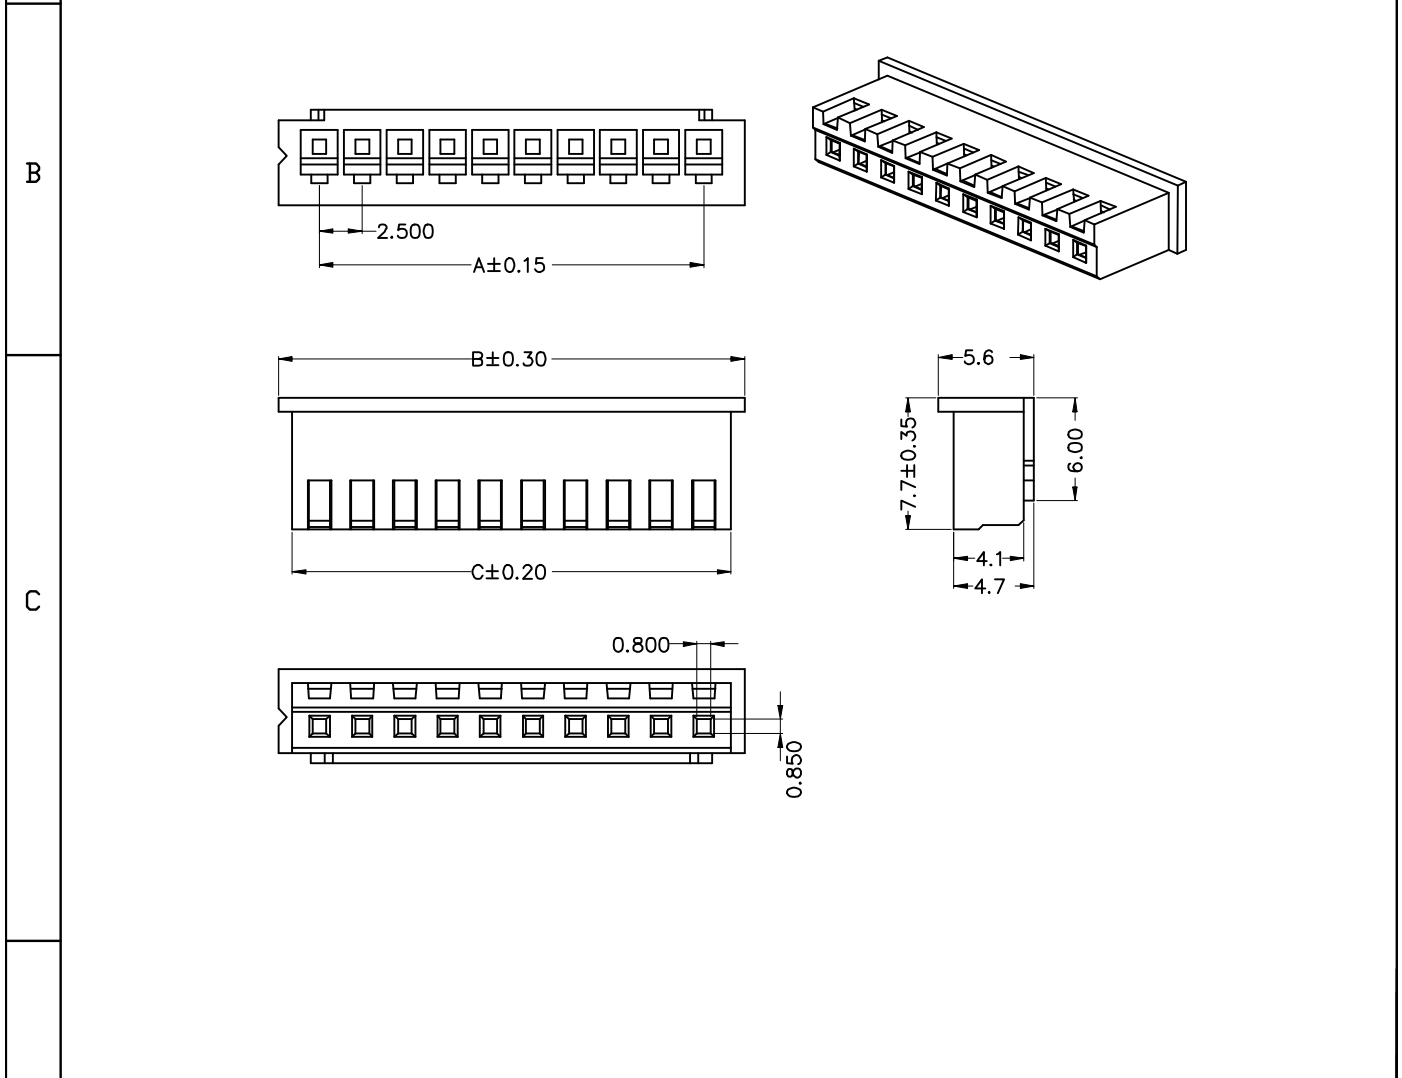

NOTE:

•Material: NYION PA66 UL 94V-0

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.50	7.30	5.70	10	22.50	27.30	25.70
03	5.00	9.80	8.20	11	25.00	29.80	28.20
04	7.50	12.30	10.70	12	27.50	32.30	30.70
05	10.00	14.80	13.20	13	30.00	34.80	33.20
06	12.50	17.30	15.70	14	32.50	37.30	35.70
07	15.00	19.80	18.20	15	35.00	39.80	38.20
08	17.50	22.30	20.70	16	37.50	42.30	40.70
09	20.00	24.80	23.20				

E	一般公差:GENERAL TOLERANCE		更改說明:REV.DESCRPTION			更改說明:REV.DESCRPTION	
	尺寸範圍DIM		△			△	
	10.01以上之尺寸	±0.30	△			△	
	10.00以內之尺寸	±0.20	△			△	
	孔位	±0.10	核准APPD	朱小华	2009-3-27	模型:MODEL	料號:ITEM NO
	文件編號	SC-EW-11	審核CHD				A2501H00-NP
比例:SCALE		 SHIH CHUAN ELECTRONICS			規格:SPEC 2.50 mm Crimp Style Connector		

